

Roson Seabed Cone Penetrometer CPT1



Our Roson Seabed Penetrometer system is capable of undertaking a rapid evaluation of in situ soil properties in a large variety of soil types in water depths of up to 500 metres. Test results are used to assess strength parameters, pore water pressure and relative soil density, as well as to provide a detailed stratigraphic profile.

Special Features


Continuous penetration into the seabed at the standard rate of 2.0 cm per second is achieved through a friction-wheel system clamped onto the CPT rods. Variable thrust from 4 - 16 tonnes. The required ballast is obtained from weights incorporated into the CPT frame.

Cones Available

- Piezocones
- Friction cones
- Electrical Conductivity Cones
- Low Capacity cones (for very soft cohesive soils)
- T Bar
- In situ Vane

Optional Features

- Penetration in excess of 15 metres is possible depending on the soil conditions and deployment arrangement.

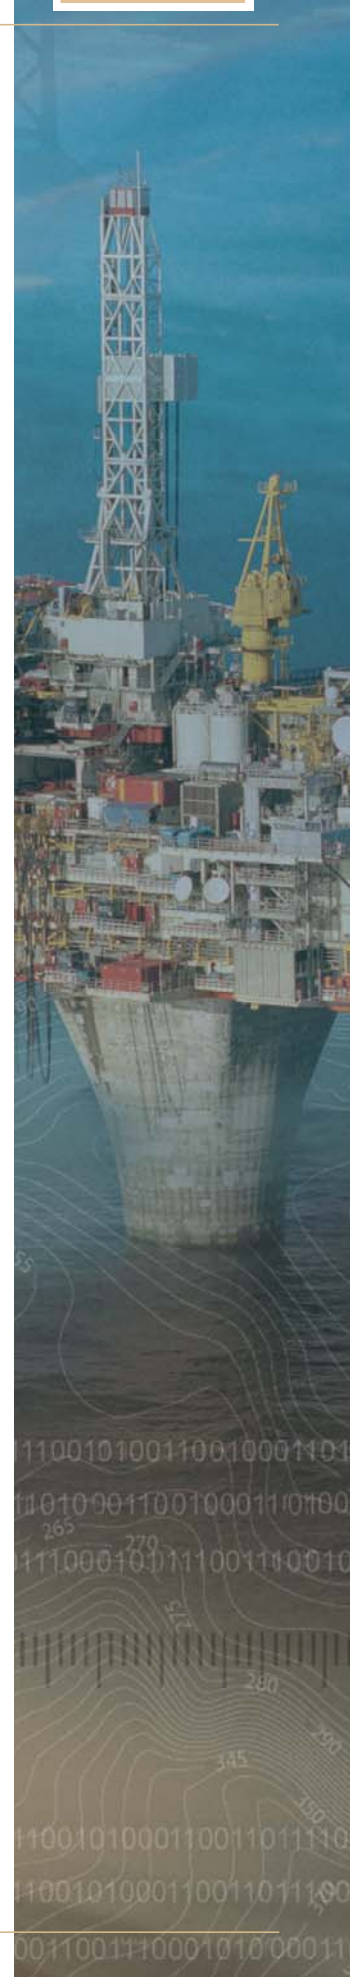


Applications

- Offshore pipeline route and subsea structure geotechnical surveys
- Pre-dredging geotechnical investigations
- Marine inshore geotechnics
- Site investigations for marine reclamation projects
- Marine aggregate surveys

Technical Data/Dimensions

UNIT	BASE(m)	WEIGHT(tonnes)	MAX THRUST(kN)
2 modules	2.2 x 3.2	5 - 10	40 - 80
4 modules	2.2 x 3.2	10 - 20	100 - 160

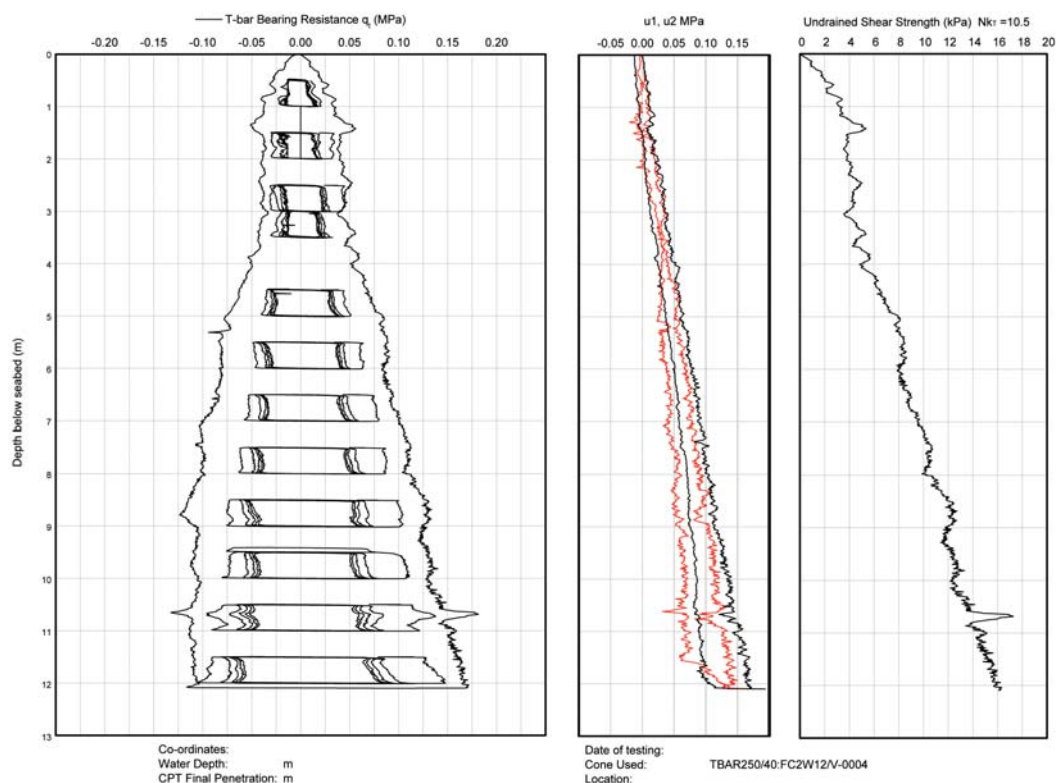

CYCLIC T-BAR PENETRATION TEST RESULTS -

Example of T-bar and cyclic T-bar data set acquired using the ROSON wheel drive PCPT. The T-Bar test is taken to full depth and return to surface, so giving an undisturbed and remoulded strength, and then multiple cyclic tests are undertaken a discrete depth intervals. Cyclic T-Bar test can be used to refine the understanding of the residual remoulded shear strength and sensitivity of the soils.

The specification of the equipment in this data sheet may be subject to modifications without prior notice

Fugro Alluvial Offshore Limited
 Morton Peto Road
 Gapton Hall Industrial Estate
 GreatYarmouth
 NR31 OLT UK
 Tel : +44 (0) 1493 650 484
 Fax : +44 (0) 1493 440 319
www.alluvial.co.uk
info@alluvial.co.uk

